





## 20 mm DRIP-IN PC WITH ROOTGUARD®

### 20mm Drip-In PC with Rootguard 2.4 L/h Run Length vs Pressure Loss

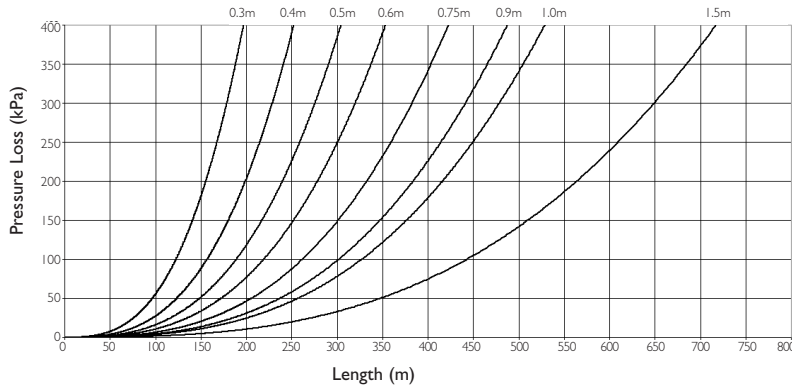

Internal Diameter: 18mm  
Outside Diameter: 20mm  
Coil Length: 300m  
Maximum operating pressure: 450 kPa

### 20mm Drip-In PC with Rootguard 4.0 L/h Run Length vs Pressure Loss

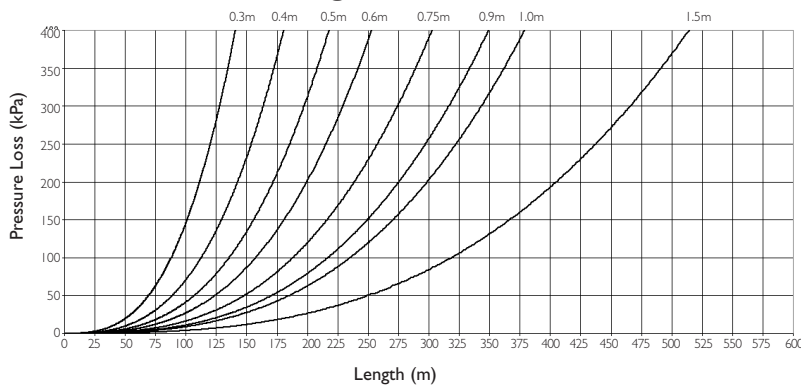

### Maximum Recommended Run Length

Inlet Pressure (kPa)	Spacing (m)															
	0.3	0.4	0.5	0.6	0.75	0.9	1.0	1.5								
	Length (m)															
150	97	69	124	89	149	107	173	124	207	148	238	171	259	186	349	252
200	123	88	158	113	189	136	220	157	262	189	302	217	328	236	444	319
250	141	101	180	129	218	156	252	181	302	216	348	251	378	271	511	367
300	156	111	199	143	240	172	279	200	333	239	384	276	417	300	565	406
350	168	120	215	154	259	186	301	216	360	258	415	297	450	323	610	438
400	179	128	229	164	276	198	321	230	383	274	442	317	480	344	651	468
<b>Nom. Flow L/h</b>	<b>2.4</b>	<b>4.0</b>	<b>2.4</b>	<b>4.0</b>	<b>2.4</b>	<b>4.0</b>	<b>2.4</b>	<b>4.0</b>	<b>2.4</b>	<b>4.0</b>	<b>2.4</b>	<b>4.0</b>	<b>2.4</b>	<b>4.0</b>	<b>2.4</b>	<b>4.0</b>

Based on minimum pressure of 100 kPa. All run lengths calculated on flat ground.

## ORDERING INFORMATION

### 20mm Drip-In PC Extra with ROOTGUARD®

Flow rate	0.3 m	0.4 m	0.5 m	0.6 m	0.75 m	0.9 m	1.0 m	1.5 m
2.4 L/h	DGC2024030	DGC2024040	DGC2024050	DGC2024060	DGC2024075	DGC2024090	DGC2024100	DGC2024150
4.0 L/h	DGC2040030	DGC2040040	DGC2040050	DGC2040060	DGC2040075	DGC2040090	DGC2040100	DGC2040150